


# RMG600

MEDIUM GRADE

For: General Office use

The fully encapsulated panel comprises of a wrap around steel top and a steel base plate that are adhesive bonded and mechanically stitched around a particle board core for greater strength and durability.

We've invested in research and development to optimise our energy and raw material usage. This system has EPD & HPD certification and is manufactured in our advanced, energy efficient manufacturing facility where 94% of the energy used is from sustainable sources.

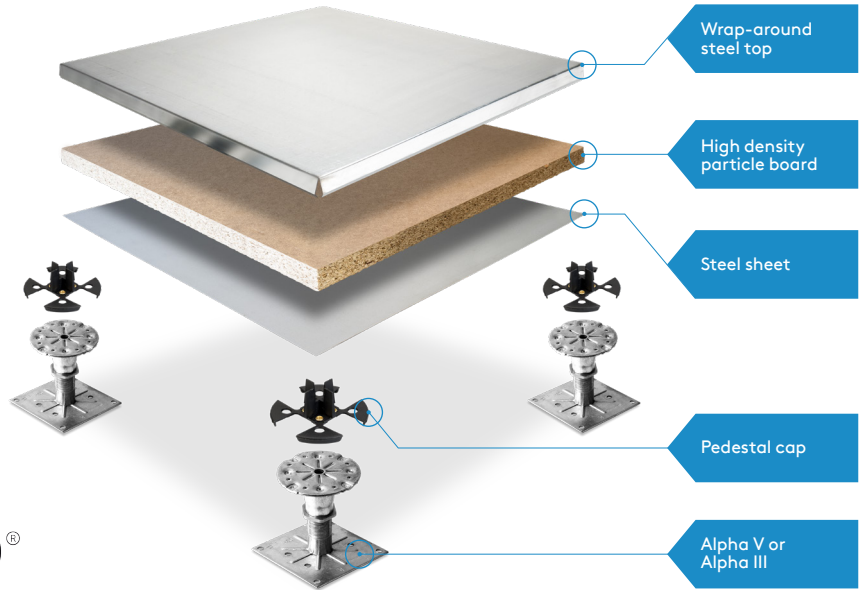

**EPD**<sup>®</sup>  
THE INTERNATIONAL EPD<sup>®</sup> SYSTEM

Panels	
Thickness:	31mm Nominal
System Weight:	36kg/m <sup>2</sup> Nominal
Panel Size:	600mm x 600mm <sup>†</sup>
Core Material:	30mm high density particle board
Category:	Loose lay


System Performance	
Point load 25 x 25mm:	3kN
Load over 300 x 300mm:	4.5kN
Uniformly Distributed Load (UDL):	8kN/m <sup>2</sup>

Panel Fire Performance	
Fire Class:	BS476-6 & BS476-7
Reaction:	EN13501:1 Bfl-s1
Resistance:	EN13501:2 R30r/RE30r

System Sound Performance	With barrier	With barrier & covering
Airborne Insulation (Dnfw):	41 dB	47 dB
Impact Insulation (Lnfw):	71 dB	63 dB
		52 dB

### Pedestal Options

Steel pedestals\* coated with an environmentally friendly clear passivation.



#### Pedestal Adhesive:

Standard or Acoustic pedestal adhesives available.

### Stringers

Recommended for additional lateral stability in the following applications:

- 600-800mm void heights: clip-on stringer system
- >800mm void heights: screw-down stringer system

### Simploc Screw Down

This system is available with pre-drilled holes allowing the panels to be screwed down to the pedestals whilst still providing full access to the floor void.

### Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

- All working loads perform to a 3x safety factor.
- Finished floor heights from 60mm to 1200mm are available using standard pedestals. For heights outside of this range alternative pedestals are available.
- Structural performance based upon a full Kingspan system i.e. panels & pedestals.

<sup>†</sup>600 x 900mm medium/heavy grade panels available for perimeter detailing.

\* Pivot-head adaptors and Nickel plated pedestals available upon request.

§ Warranty only valid when a full Kingspan Access Floor system including panels and understructure is installed.



The mark of responsible forestry

### Kingspan Access Floors

Burma Drive, Hull, HU9 5SG, United Kingdom

T: +44 (0)1482 781701 E: KAFinfo@kingspan.com W: kingspan.com

